



PA 440

Field Display for current loop with Contacts

Functional range

- ▶ free scalable display
- ▶ switch mode, hysteresis, parameterizable deceleration of the contacts
- ▶ no external power supply necessary

Product characteristics

- ▶ field display for pressure transmitter with output signal: 4 ... 20 mA / 2-wire or 0 ... 10 V / 3-wire
- ▶ 4-digit LCD display
- ▶ plastic housing
- ▶ pressure compensation element with PTFE-Filter


Optional versions

- ▶ IS-version
- ▶ 2 contacts
- ▶ 4-digit LED display

Typical application



in situ display at pumping stations

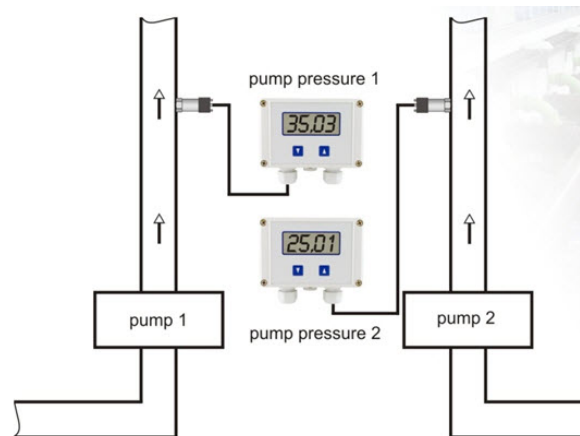

Ordering code PA 440

PA 440

□□□□-□□-□□-□□-□□-□□-□□

Standard version		8	5	1																
Analogue output																				
	4 ... 20 mA / 2-wire				1															
	Intrinsic safety for zone 1 / 4 ... 20 mA / 2-wire				E															
	customer				9															consult
Contact																				
	without contact				0															
	2 contacts ¹				2															
Unit																				
	without ²				0															
	bar				1															
	mbar				2															
	mH ₂ O				3															
	%				P															
	mA				A															
	customer				9															consult
Label on display																				
	standard				1															
	neutral				N															
	customer				9															consult
Display																				
	LC display																			
	LED display																			
Housing material																				
	plastic ABS																			
Special version																				
	standard																			
	overvoltage protection ³																			
	customer																			consult

¹ only possible in combination with LED display

² the unit signs are loose-settled

³ not possible for Ex-version

